

- Operates in any position
- Does not generate hammering
- Spring return
- Nitrile seat
- Flanged and Drilled BS 4504 PN 16
- WRAS Approved


## Pressure/Temperature Rating

Maximum Temperature: 100°C

Maximum Pressure: 16 bar

## Test Pressures (Hydraulic)

Shell: 24 bar

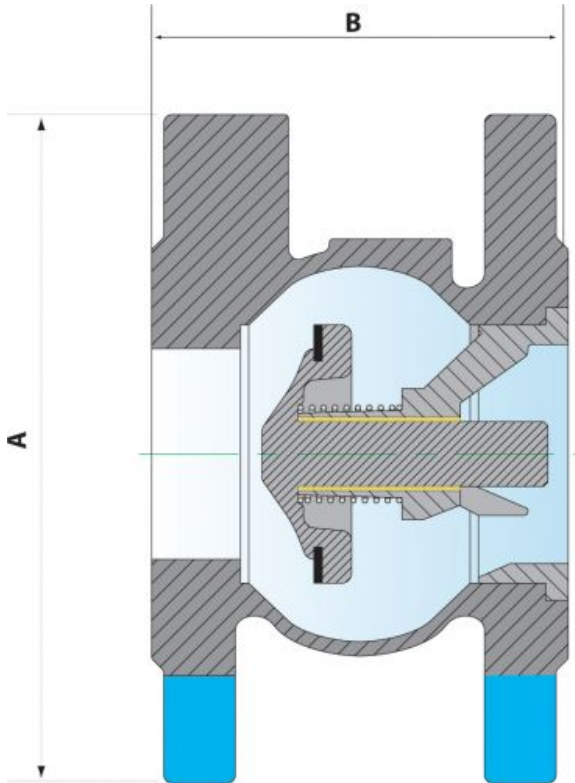

## Materials

Part	Material
Body	Cast Iron GG25
Piston	Cast Iron GG25
Ring	100mm Brass, 100mm Bronze
Seat	Nitrile A-171 WBS Approved
Spring	302S Stainless Steel

## Dimensions & Weights

DN (mm)	50	65	80	100	125	150	200	250	300
A (mm)	165	185	200	220	250	285	340	405	460
B (mm)	100	120	140	170	200	230	288	354	396